

# AIR STAPLER




| Specifications |       |            |   |                           |                    |                  |                      | Recommended Air Pressure 80 ~ 100 psi |                               |
|----------------|-------|------------|---|---------------------------|--------------------|------------------|----------------------|---------------------------------------|-------------------------------|
| Model          | Gauge | Crown (mm) | Staple Size W.x T.x L.(mm)                                      | Tool Size L.x H.x W. (mm) | Load Capacity (pc) | Net Weight (kgs) | Sound Pressure (dBA) | Vibration (m/sec)                     | Packing                       |
| GP-71/16K      | 22    | 9.1        | 0.75 x 0.60 x (6-16)  | 200 x 147 x 42            | 100                | 0.96             | 77.4                 | 1.10                                  | 10 pcs/0.9 cu-ft/G.W.: 11 kgs |
| GP-80/16K      | 21    | 12.8       | 0.95 x 0.65 x (6-16)  | 200 x 147 x 42            | 100                | 0.96             | 77.4                 | 1.10                                  | 10 pcs/0.9 cu-ft/G.W.: 11 kgs |
| GP-80/25K      | 21    | 12.8       | 0.65 x 0.95 x (10-25)   | 240 x 177 x 51            | 100                | 1.10             | 79.8                 | 2.12                                  | 10 pcs/1.2 cu-ft/G.W.: 13 kgs |
| GP-90/25K      | 18    | 5.8        | 1.00 x 1.25 x (10-25)   | 240 x 177 x 51            | 100                | 1.10             | 78.9                 | 2.12                                  | 10 pcs/1.2 cu-ft/G.W.: 13 kgs |
| GP-90/40K      | 18    | 5.8        | 1.00 x 1.25 x (10-40)   | 310 x 270 x 77            | 100                | 2.18             | 82.8                 | 3.06                                  | 5 pcs/1.5 cu-ft/G.W.: 16 kgs  |
| GP-50/40K      | 18    | 5.8        | Stapler: 1.00 x 1.25 x (10-40)<br>Nailer: 1.00 x 1.25 x (15-50) | 237 x 237 x 50            | 100                | 1.70             | 78.8                 | 2.86                                  | 10 pcs/1.4 cu-ft/G.W.: 18 kgs |

# AIR NAILER / PINNER



| Specifications |       |   |                           |                    |                  |                      |                   | Recommended Air Pressure 100 psi |  |
|----------------|-------|---|---------------------------|--------------------|------------------|----------------------|-------------------|----------------------------------|--|
| Model          | Gauge | Nail Size W.x T.x L.(mm)  | Tool Size L.x H.x W. (mm) | Load Capacity (pc) | Net Weight (kgs) | Sound Pressure (dBA) | Vibration (m/sec) | Packing                          |  |
| GP-16/50K      | 16    | 1.60 x 1.40 x (20-50)   | 310 x 270 x 77            | 100                | 2.18             | 81.1                 | 3.00              | 5 pcs/1.5 cu-ft/G.W.: 16 kgs     |  |
| GP-16/64K      | 16    | 1.60 x 1.40 x (25-64)   | 295 x 303 x 92            | 100                | 2.48             | 83.0                 | 3.06              | 5 pcs/2.7 cu-ft/G.W.: 18 kgs     |  |
| GP-F18/30K     | 18    | 1.20 x 1.00 x (10-30)   | 235 x 197 x 55            | 100                | 1.20             | 76.7                 | 1.94              | 10 pcs/1.2 cu-ft/G.W.: 13 kgs    |  |
| GP-F18/50K     | 18    | 1.20 x 1.00 x (15-50)   | 205 x 240 x 55            | 100                | 1.40             | 79.0                 | 2.40              | 10 pcs/1.5 cu-ft/G.W.: 16 kgs    |  |
| GP-T64K        | 14    | 2.20 x 1.63 x (18-64)   | 300 x 270 x 100           | 80                 | 2.50             | 85.0                 | 3.00              | 5 pcs/2.7 cu-ft/G.W.: 18 kgs     |  |
| GP-PO.6/25K    | 23    | 0.64 x 0.64 x (12-25)   | 225 x 152 x 45            | 200                | 1.00             | 73.4                 | 1.05              | 10 pcs/1.17 cu-ft/G.W.: 12 kgs   |  |
| GP-CF15K       |       | Crown x T.x L. (mm): 2.54 x 2.20 x (9,12,15)  | 300 x 270 x 87            | 80                 | 2.66             | 85.0                 | 4.40              | 5 pcs/2.7 cu-ft/G.W.: 18 kgs     |  |
| GP-90/21K      |       | Shank Type: Smooth, Screw, Ring<br>Shank Dia.: 2.87, 3.05, 3.33 mm<br>Round Head, Collated: Plastic | 478 x 350 x 127           | 105                | 3.80             | 92.4                 | 4.40              | 1 pc/1 cu-ft/G.W.: 4.5 kgs       |  |

AIR  
C HOG  
RING  
PILER /  
NAILER

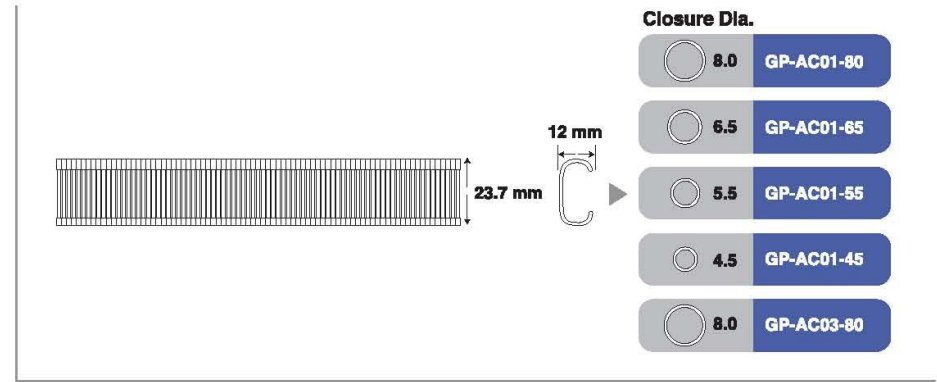

| Specifications |       |                |            |                   |                   |                     |                  | Recommended Air Pressure 90 ~ 105 psi |                      |  |
|----------------|-------|----------------|------------|-------------------|-------------------|---------------------|------------------|---------------------------------------|----------------------|--|
| Model          | Gauge | Wire Dia. (mm) | Crown (mm) | Shank Height (mm) | Closure Dia. (mm) | Load Capacity (pcs) | Net Weight (kgs) | Tool Size (LxHxW)                     | Packing              |  |
| GP-AC01-80     | 15    | 1.8            | 23.7       | 12                | 8.0               | 100                 | 1.45             | 315 x 182 x 90                        | 6 pcs/2 cu-ft/12 kgs |  |
| GP-AC01-65     | 15    | 1.8            | 23.7       | 12                | 6.5               | 100                 | 1.45             | 315 x 182 x 90                        | 6 pcs/2 cu-ft/12 kgs |  |
| GP-AC01-55     | 15    | 1.8            | 23.7       | 12                | 5.5               | 100                 | 1.45             | 315 x 182 x 90                        | 6 pcs/2 cu-ft/12 kgs |  |
| GP-AC01-45     | 15    | 1.8            | 23.7       | 12                | 4.5               | 100                 | 1.45             | 315 x 182 x 90                        | 6 pcs/2 cu-ft/12 kgs |  |
| GP-AC03-80     | 15    | 1.8            | 23.7       | 12                | 8.0               | 100                 | 1.50             | 332 x 182 x 90                        | 6 pcs/2 cu-ft/13 kgs |  |

AIR  
GREASE  
GUN



| Specifications |                    |                         |                  |                  | Recommended Air Pressure 60 ~ 90 psi |  |
|----------------|--------------------|-------------------------|------------------|------------------|--------------------------------------|--|
| Model          | Capacity Bulk (cc) | Capacity Cartridge (oz) | Net Weight (kgs) | Air Inlet (inch) | Packing                              |  |
| GP-850N        | 400                | 14                      | 1.15             | 1/4"             | 10 pcs/1.53 cu-ft/G.W.: 16 kgs       |  |
| GP-850C        | 400                | 14                      | 1.55             | 1/4"             | 10 pcs/1.8 cu-ft/G.W.: 18.3 kgs      |  |
| GP-850CR       | 400                | 14                      | 1.67             | 1/4"             | 10 pcs/1.9 cu-ft/G.W.: 18 kgs        |  |
| GP-850KA       | 450                | 14                      | 1.00             | 1/4"             | 10 pcs/2.5 cu-ft/G.W.: 14 kgs        |  |
| GP-850KB       | 450                | 14                      | 1.00             | 1/4"             | 10 pcs/2.5 cu-ft/G.W.: 14 kgs        |  |

